

QUARTZITIC SANDSTONE



Natural



Antiqued




Sanded



Leather



Oceana

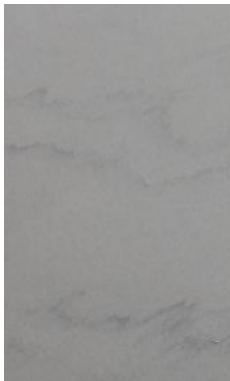

Satin



Honed



Desert



HydroPlus



Paving



Walling



Coping



Steps



Setts



Kerbs



Architecture

A fine-grained stone renowned for its texture, durability, and resilience, Silver Path's pale grey hue when dry and a deeper grey tone when wet exudes architectural charm, pairing natural simplicity with enduring performance. Its resistance to environmental stress makes it well-suited for architectural and landscape applications.

- ✓ Excellent load-bearing capacity
- ✓ Superior frost and excellent weathering resistance
- ✓ High abrasion resistance suits it for flooring and paving use

Physical Properties	
Apparent Density (kg/m ³)	2,550
Water Absorption (%)	1.2 – 1.4

Mechanical Strength	
Compressive Strength (MPa)	160 – 200
Flexural Strength (MPa)	30 – 36

Dimensions, thicknesses, and configurations of slabs can be customised in accordance with specific project or client requirements. Technical data sheets, quality certifications, and laboratory test reports can be furnished upon request or as required by the project specifications. Images are digitally created for representational purposes to convey tone and character; natural stone may vary in colour and pattern.